





# SPECIAL APPLICATION SPRING BRAKES

Committed  
To Quality...


## TRANSIT STYLE

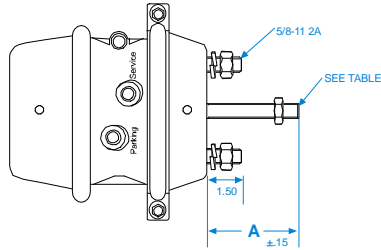


## REMOTE STYLE

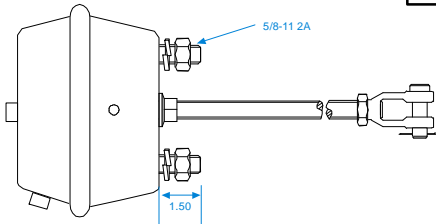

## MACK STYLE

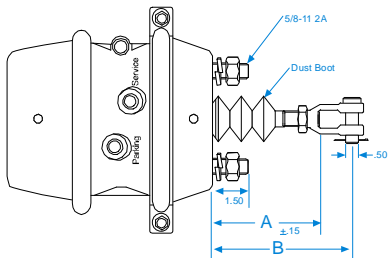

## INTRAAX LOW AND TOP MOUNT

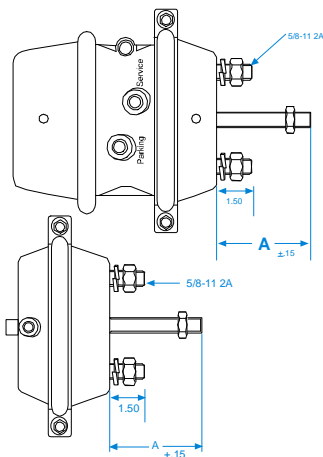

PART NO	SIZE	MODEL	STROKE	DIM. "A"	ROD DIA.
12477	2430	PS-LS	2.50"	12"	5/8"
12478	2430	PS-LS	2.50"	18"	3/4"
12861	2430	PS-ELS	3.00"	12"	5/8"
12862	2430	PS-ELS	3.00"	18"	3/4"
12534	3030	PS	2.50"	12"	5/8"
12577	3030	PS	2.50"	18"	3/4"
12961	3030	PS-ELS	3.00"	12"	5/8"
12962	3030	PS-ELS	3.00"	18"	3/4"
12665	3036	PS	2.50"	12"	5/8"
12666	3036	PS	2.50"	18"	3/4"
12766	3636	PS	3.00"	12"	5/8"
12767	3636	PS	3.00"	18"	3/4"

PART NO	SIZE	MODEL	STROKE
13500	30	PS	2.50"
13501	30	PS-ELS	3.00"

\*\*SPECIAL FEATURES: STANDARD MOUNT  
\*\*ELS=EXTENDED LONG STROKE \*\*PS=PERMANENT SEAL

PART NO	SIZE	MODEL	STROKE	DIM. "A"	DIM. "B"
12369	2424	PS	2.50"	2.00"	3.25"
12422	2430	PS	2.50"	2.00"	3.25"
12522	3030	PS	2.50"	2.00"	3.25"

\*\*SPECIAL FEATURES: PUSH ROD BOOT

PART NO	SIZE	MODEL	STROKE	DIM. "A"	APPLICATION
12580	3030	PS	2.50"	5.65"	Low Mount
12581	3030	PS	2.50"	9.80"	Top Mount
12902	3030	PS-ELS	3.00"	5.65"	Low Mount
12903	3030	PS-ELS	3.00"	9.80"	Top Mount

PART NO	SIZE	MODEL	STROKE	DIM. "A"	APPLICATION
10542	30	STND	2.50"	5.65"	Low Mount
10540	30	STND	2.50"	9.80"	Top Mount
10902	30	ELS	3.00"	5.65"	Low Mount
10903	30	ELS	3.00"	9.80"	Top Mount

\*\*ELS=EXTENDED LONG STROKE \*\*STND=STANDARD STROKE